

TIBC Kameleon 4 / Kameleon 6

User Manual

Contents

1.	Safety Information	2
1	.1. Installation location	3
1	.2. Warning	3
1	.3. Cleaning and maintenance	3
1	.4. Before moving the appliance	3
1	.5. Storm	3
1	.6. Do not drop small items or a liquid into the appliance	3
1	.7. Repacking the appliance	3
2.	Introduction	. 4
3.	First time speaker setup	. 5
3	.1. In the box	. 5
3	.2. Top panel layout	. 6
3	.3. Rear panel layout	7
3	.4. Initial setup steps	. 8
3	.5. App download	. 8
4.	Wi-Fi mode	. 9
4	.1. Wi-Fi mode setup	. 9
4	.2. Wi-Fi mode – Alternative setups	14
4	.3. Playing music via My Music and Internet Radio Services	18
4	.4. Solo, Group and Stereo modes	22
4	.5. Using the pre-set functions	23
5.	Bluetooth mode	25
6.	Line In mode	26
7.	Additional Information	27
7	.1. Software updates:	27
7	.2. Factory reset:	27
8.	Troubleshooting	28
9.	Specifications	29



cause a fire.

Page 2 / 29

Do not wash the appliance or use it in the bathroom, or it may cause potential injuries and other problems.

Do not use the appliance if the supply voltage is lower than 90V or higher than 240V. If the supply voltage is lower than 90V, the appliance may not work, and its lifetime may be affected. If the voltage is higher than 240V, the appliance may catch on fire or

Be careful of the power cord and maintain it as appropriate. To ensure safety, do not twist the power cord, do not pull it out of the


socket, do not compress it or stretch its length.

If you are not using the appliance, pull the power cord out of the mains socket.

Do not disassemble or attempt to repair the appliance on your own.

Do not share the power socket with another appliance

1. Safety Information











1.1. Installation location

Leave sufficient space around the appliance of at least 5 cm from any wall/obstacle to ensure proper ventilation and prevent the appliance from overheating. The following places are not suitable installation locations for the appliance:

- An unstable location
- A location near a heat source or in direct sunlight.
- In a wet or dusty environment

1.2. Warning

To prevent suffering an electrical shock or another accident, do not operate the appliance in a rainy or humid environment.

1.3. Cleaning and maintenance

Use a soft cloth or cotton dipped in a neutral solution for cleaning the surface of appliances. Do not use the type of cloth that you use for washing dishes or aggressive chemical agents.

1.4. Before moving the appliance

Before moving the appliance to a different location, please take the disc out of the appliance so that the disc and appliance will not be damaged.

1.5. Storm

If the appliance is not working properly during a storm, please disconnect the plug from the power socket and reinsert it after a minute.

1.6. Do not drop small items or a liquid into the appliance

In the event that you find small items or a liquid inside the appliance, you see smoke or smell an odour, immediately disconnect the appliance from the power grid. Send the appliance to an authorised service centre.

1.7. Repacking the appliance

When sending the appliance by a transport company, use the original packaging to prevent its damage during transport.




2. Introduction

Thank you for purchasing the TIBO Kameleon 4/6. We hope that your experience with the Kameleon 4/6 will be enjoyable for many years to come.

With Smart Audio capability and controlled by the FREE TIBO App, the Kameleon 4/6 can be used to playback audio in single, stereo or group mode at the touch of a button. High Resolution audio streaming via Wi-Fi or Bluetooth makes music from a wide range of sources immediately available. Plus, the speaker has five pre-sets which can be toggled through for thousands of internet radio stations and playlists. Comes with 3 sets of interchangeable panels, white dark grey and walnut, for matching your home décor.

The Spotify software is subject to third party licenses found here: <u>https://developer.spotify.com/legal/third-party-licenses/</u>




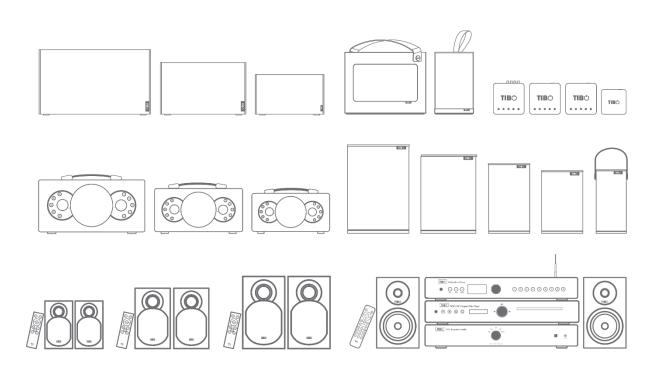

3. First time speaker setup


3.1. In the box

- Kameleon speaker
- Standard UK plug
- Standard EU plug
- 3 pairs of side panels
- Quick start guide
- Setup warning

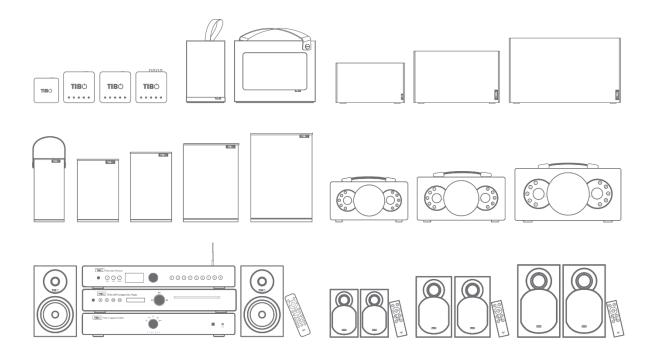




3.2. Top panel layout

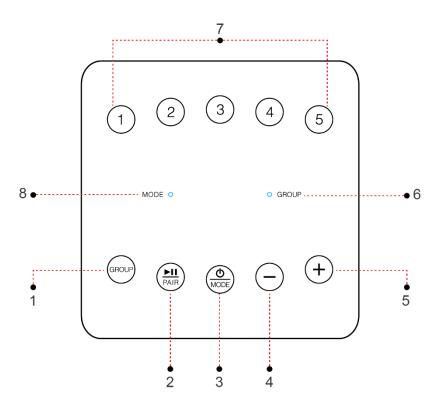

- 1. Group Function: (Press to group the Tap with other Smart Audio products)
- Play/Pause/Pair Function: Short press – Play and pause track Long press – Pair device with Bluetooth
- Mode/Power Button:
 Long press turn on/off
 Short press Choose between Bluetooth/Wi-Fi/Line in modes
- 4. Volume down
- 5. Volume up
- 6. Group Light: (White light when in group mode)
- 7. Pre-set Functions: (Choose between selected pre-sets 1-5)
- **8.** Mode Light: (Red light Wi-Fi mode) (Green light Line in mode)



3.3. Rear panel layout

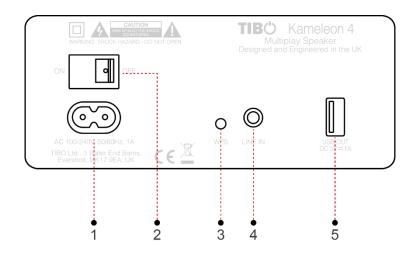

- 1. Power cable port
- 2. Power Switch: On / off
- 3. WPS Button: Short press to connect to Wi-Fi
- 4. Line in (3.5mm audio stereo input)
- 5. USB Input: For charging your phone / tablet



3.4. Initial setup steps

- **1.** Before using this product for the first time, please connect the appropriate power cable to the power input port on the rear.
- 2. Then turn on the power switch also on the rear panel.
- **3.** The Kameleon 4/6 will respond by saying "Power on, powering up for the first time, please wait."
- **4.** Do not do anything until the Kameleon speaker has finished booting up. The Kameleon speaker will say "Ready for app setup" when boot up is complete.

3.5. App download

The TIBO app helps you get setup for the first time and helps get the most out of your speaker's functions.

The app is compatible with iOS and Android smartphones and can be downloaded for free on Google Play or in the App Store.



Scan QR code:





With the TIBO app you can:

- Browse and connect to over 15000 internet radio stations
- Select a sound source
- Manage Multi Mode groups
- Set up, modify, and play your pre-sets
- Check what song or other media is currently playing
- Adjust individual and multi-room volume settings
- Rename your speaker
- Adjust panning
- Add more speakers



4. Wi-Fi mode

4.1. Wi-Fi mode setup

- With the Kameleon 4/6 turned on, press the mode button until Wi-Fi mode is activated.
- A red light will start flashing and the Kameleon 4 / 6 will respond saying "Wi-Fi mode."
- You will need to make sure you have the TIBO app downloaded onto your smart device in order to connect your speaker to your Wi-Fi.




 Open the TIBO app on your Android or iOS device and follow the instructions on screen.

- Once opened, if your TIBO app has no devices connected to it, the screen should look like this.
- Click on "Wi-Fi Setup Wizard" at the bottom of the page.



- Make sure you're connected to 2.4G Wi-Fi as TIBO Smart Audio products are only compatible with 2.4G Wi-Fi.
- Then press "Next". If your router is dual band (2.4G and 5G) this is also fine.
- If your router is 5G Wi-Fi only, TIBO speakers will not connect to this Wi-Fi.
- Find your Wi-Fi network, type in your password and then press "Next".





l

- Press the WPS button on the rear of the Kameleon 4 / 6.
- The Kameleon 4 / 6 will respond by saying "Searching for Wi-Fi connection."
- Then press "Next".







l

- Then wait for the Kameleon 4 / 6 to connect to your Wi-Fi.
- After connected, the Kameleon 4 / 6 will respond by saying "Wi-Fi connected".
- Then press "Next".

	PLEASE WAIT	
3	Wait for device to be connected to Wi-Fi	
	Don't operate device during the Wi-Fi setup. Please wait for the completion of setup patiently. It's usually finished in 60 seconds.	
	101 	
	Cancel	
	If you hear the voice prompt you for an error, please go back and retry.	

CONNECTED	
\checkmark	
Device is connected to TIBO Network successfully	
Current Wi-Fi strength of device:100%	
Next	







- You can now name your Kameleon 4 / 6 within the app.
- Either select from the list of pre-set options or click on custom to set your own name.
- Then press "Finish".

- Your Kameleon 4 / 6 will now appear on your "Device List" within the app.
- To add more devices, press the cross icon "+" in the top right of the screen.

l

4.2. Wi-Fi mode – Alternative setups

 In some circumstances, the router may not connect with your TIBO product using the above method. If your product does not connect first time, you will be prompted to an alternative Wi-Fi setup method.

On the next screen you will see an option

Click this to directly enter the Wi-Fi

settings in your phone / tablet and find your TIBO product's own Wi-Fi signal.


titled "Settings" as a prompt.

If a password is required, use:

smart-audio

Click "Alternative Way to Setup".




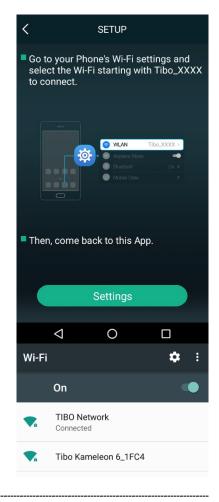


TIB()

Kameleon 4 / 6

Then return to the TIBO app either pressing the back button on your phone / tablet or reopen the app by clicking on the TIBO logo. The screen below will then appear, select your own Wi-Fi network and type in your Wi-Fi's password.




Then wait for your product to connect to your Wi-Fi. When connected, your product should respond by saying "Wi-Fi connected" and the red light will become still instead of flashing. Then press "Next".

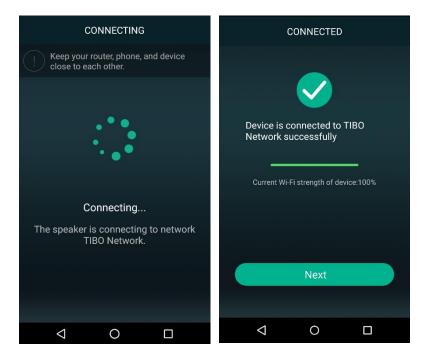



- You can now name your TIBO product within the app. Either select from the list of pre-set options or click on "custom" to set your own name.
- Then press "Finish".
- Your product will then appear at the top of your "Device List" page and you're ready to start streaming music.

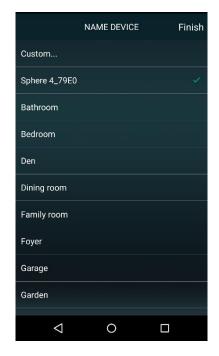






Wi-Fi mode setup without the TIBO app

If you are struggling to connect your TIBO Smart Audio product to your Wi-Fi using the TIBO app, then you can use this last resort method that does not involve the app itself.

- Make sure your TIBO product is turned on and in Wi-Fi mode.
- Using your smartphone / tablet, open the Wi-Fi settings page and connect directly to your TIBO product's own Wi-Fi instead of your own router. If a password is required, use – smart-audio
- Exit your Wi-Fi settings page and then open the internet browser on your smartphone / tablet. Click the web address bar at the top of the page and type in this exact IP address http://10.10.254 and then press enter.
- On this web page, you should see a list of the local networks in the area. Find your own router on this list and type in your router's password.
- After about 10-20 seconds, you should then hear your TIBO product say "Wi-Fi connected" and/or the red flashing light on your product will become still.
- Finally, exit the internet browser on your smartphone / tablet and go back into the Wi-Fi settings to reconnect with your own router rather than the TIBO product's own Wi-Fi. Then open the TIBO app and your product will be there in the Device List page.




4.3. Playing music via My Music and Internet Radio Services

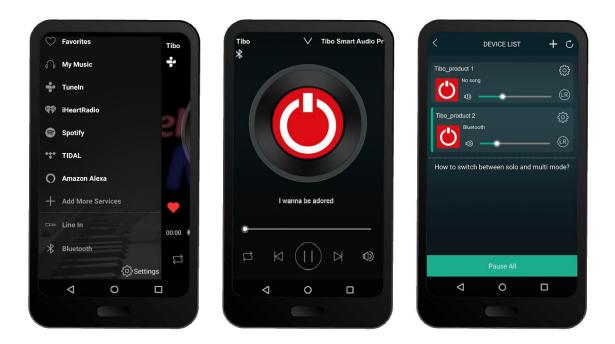

- Swipe left and right to navigate between each page of the app.
- The page on the left here is the main menu where you will have access to different streaming options.

My Music


- Here you can select music directly stored on your phone or if you have a NAS drive, you can select music from here.
- NOTE: Make sure your NAS drive is connected to the same Wi-Fi as your TIBO product in order for it to appear under this section. Also, not all NAS drives are compatible with the TIBO app.






Tuneln

- Here you will have access to roughly 15,000 internet radio stations around the world.
- Search each radio station by location, genre or name.
- These radio stations can also be saved as pre-sets.
- See the page <u>Using the pre-set</u> <u>functions</u> on how to do this.

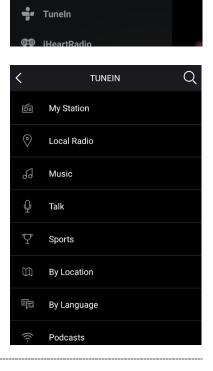






iHeartRadio

 In order to use radio stations on here, you will need to sign in or create an account.



Spotify

- Clicking on Spotify within the TIBO app will redirect you to the main Spotify app. From here, play some music on Spotify.
- Click on "Devices Available" at the bottom of the screen on Spotify.
- Find your Kameleon 4 / 6 on the list and connect.

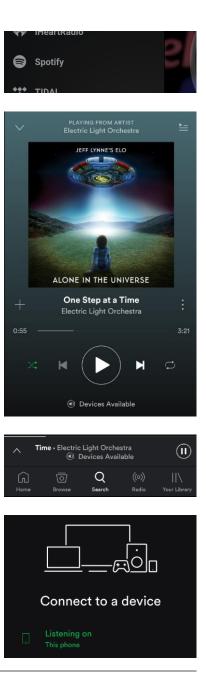






 To stream from either of these services, login to your account when prompted on screen and search for songs, artists or albums to stream.

Add More Services

 Click here to find hidden services that can be added to the main menu.

Note

- Below the Add More Services icon, you will see a Line In and Bluetooth option. This means that by selecting either of these you can change the input mode of your TIBO product using the app itself.
- More options will be available in this section depending on how many input modes your TIBO product includes.
- You will only be able to change input mode using the app once your product is connected to Wi-Fi.



*** TIDAL

A Email/Username

A Password

PLEASE LOGIN TIDAL.

Login

Add More Services




4.4. Solo, Group and Stereo modes

- In order to group products together, you will need a minimum of 2 TIBO Smart Audio products. These can be any TIBO Smart Audio products.
- Press the cross icon "+" in the top right corner to add more devices to your Wi-Fi.

(See Wi-Fi mode setup)

- Then follow the same Wi-Fi connection process as before to add more TIBO products to your Device List.
- To group speakers together, simply press and hold one of the speakers within your 'Device List' and drag it on top of another speaker.
- Alternatively, you can press the 'Group' button on the Kameleon 4/6, and this will group everything in your Device List with the Kameleon 4/6.
- When grouped together, the Kameleon 4/6 will respond by saying "group mode."
- There will also be a white line on the app to show the connection of grouped speakers.
- Now you can assign each speaker to different channels to make a 2.1 system.
- Simply click the LR circle next to the volume bar to select between Left, Right or Stereo Audio






DEVICE LIST

Tibo_product 1

+ 0

<u>نې</u>








4.5. Using the pre-set functions


 On the main menu of the TIBO app, click on TuneIn and search for the radio station that you'd like to save as a preset.

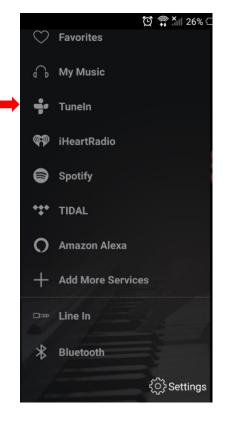

- Next to all the radio stations you will see a speaker icon on the right of the screen.
- Click on the speaker icon to open the pre-set content.







 Then click on any of the pre-sets 1-5 to save a radio station as a pre-set. The Kameleon 4 / 6 will respond by saying "pre-set saved."

 Press the corresponding number button on the Kameleon 4 / 6 to recall the preset.





5. Bluetooth mode

- Hold the power/mode button to turn on.
 If performed correctly, speaker will respond by saying "Power on".
- The speaker will then tell you what mode is currently activated. E.g. Wi-Fi mode.
- Short press the mode button until the speaker responds saying "Bluetooth mode". The mode light will also turn blue.



- Enable the Bluetooth setting on your source and your source will then automatically search for nearby Bluetooth devices.
- When "TIBO Kameleon 4/6" appears on your list "available devices", click to pair your source with the Kameleon 4/6. When connected, the speaker will respond saying "Bluetooth connected."

Settings Bluetooth		
Bluetooth		
Now discoverable as '		
MY DEVICES		
Tibo Product Not Connected (i)		
DEVICES		
To pair an Apple Watch with your iPhone, go to the Watch app.		

 You can now play music from your device to the Kameleon 4 / 6 via your source, Spotify etc



6. Line In mode

 Whilst the Kameleon 4 / 6 is turned off, connect a 3.5mm jack cable to the "Line in" port at the rear of the speaker and the other end of the cable to your Android/iOS device. This is to avoid speaker pop when the speaker is turned on.



- Hold the power/mode button to turn on. If performed correctly, speaker will respond by saying "Power on". The speaker will then tell you what mode is currently activated. E.g. Wi-Fi mode.
- Short press the mode button until the speaker responds saying "Line In mode." The mode light will also turn green.




 You can now play music from your device to the Kameleon 4 / 6 via your source, Spotify etc

7. Additional Information

7.1. Software updates:

Every so often you may have the opportunity to update the software. This is due to new functions and improved performance.

A red 'update' box will appear next to the 'settings' icon on the TIBO app when there are updates available.



7.2. Factory reset:

Pressing the WPS button will make the Kameleon search for a Wi-Fi connection. However, if you HOLD the WPS for 5 seconds, your Kameleon speaker will restore itself to factory settings. The Kameleon 4 / 6 will respond by saying "restore to factory settings."

TIBĊ

8. Troubleshooting

Problem	Possible Cause	
No power	Power switch is off at the back of the speaker.Power cord loose	
No sound	 The speakers are disconnected. Volume control is at lowest level. The 3.5 mm jack is not inserted properly. 	
Suddenly no sound during operation	 Speakers may have been disconnected from Wi-Fi/Bluetooth. The product may have entered overheat protection mode. 3.5mm jack disconnected 	
Bad sound/sound distorted	Audio source problemBad or incorrect speaker connections.	
Product dropping in and out of Wi-Fi	Wi-Fi speedProduct too far away from router	
Cannot connect to router	 Ensure router is dual band, as TIBO products only connect with 2.4GHz and NOT 5GHz 	
Product dropping in and out of Bluetooth	Source is too far away from speakerBad Bluetooth signal from source	



9. Specifications

	_
	_

Product name	Kameleon 4
Power supply	AC 100-240V
Max output power	27W
Frequency response	100Hz – 20kHz
Impedance	4ohms
Bluetooth range	10 meters
Dimensions	160 x 260 x 115mm
Weight	2.19 kg
Sound resolution	24 bit/192kHz

Product name	Kameleon 6
Power supply	AC 100-240V
Max output power	60W
Frequency response	80Hz – 20kHz
Impedance	4ohms
Bluetooth range	10 meters
Dimensions	210 x 340 x 150mm
Weight	3.7 kg
Sound resolution	24 bit/192kHz



Product name	Kameleon Touch
Power supply	AC 100 – 240 V
Max output power	24 W
Frequency response	180Hz – 15kHz
Impedance	6ohms
Bluetooth range	10 meters
Dimensions	130 x 200 x 95 mm
Weight	1.8 kg
Sound resolution	24 bit/192kHz

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG Inc. and any use of such marks by TIBO is under license. Other trademarks and trade names are those of their respective owners.

